



# ENHANCE

## Ultra high solids floor polish

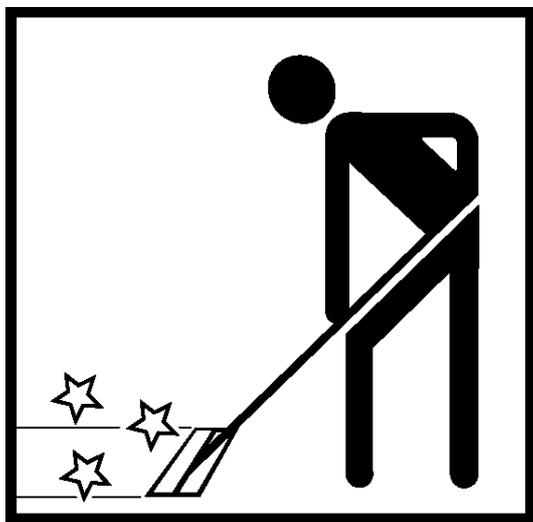

### Description

Ultra high solids metallised floor polish for prestigious floors. Dries to an extra durable, brilliant wet look finish. Suitable for most floors including vinyl, rubber, asphalt, marble, terrazzo & sealed surfaces.

### Features & Benefits

- Ultra high solids formulation for extra floor protection.
- Excellent levelling properties for smoother application.
- Slip resistant finish for a safer working environment.
- Extremely scuff resistant to make it easier to clean & maintain.
- Responds to high & ultra high speed burnishing.
- Ideal for very heavy traffic areas.
- Coverage per 5lt – 400/500 sq. metres for 1 coat.

### How to Use

Use undiluted.

Pour polish into bucket or tray.

Place mop or applicator into polish, lightly squeeze out surplus.

Apply polish to dry floor thinly & evenly in WEST to EAST direction.

Leave to dry for approximately 30 minutes.

Apply a further coat of polish thinly & evenly at right angles to first, i.e. NORTH to SOUTH. Leave a 10cm gap at floor edge to avoid a build-up.

Leave to dry for approximately 30 minutes.

Further coats may be necessary dependent on the age, porosity of the floor & the type of maintenance system being used.

*FOR MORE DETAILED INFORMATION PLEASE REFER TO  
EVANS GUIDE TO FLOORCARE*

### Composition

Contains an aqueous dispersion of metallised acrylic co-polymers, wax emulsion, ammonia soluble resin, plasticisers, coalescent, defoamer, levelling agent & preservative.

### Typical Product Data

Appearance:	Opaque liquid
Odour:	Characteristic
Specific Gravity (20°C):	1.036
Colour:	White
pH – undiluted:	8.6
Shelf Life Unopened:	Not less than 3 years

### Packaging

Pack:	Order Code	Pallet Size
5lt	A098E	120x5lt

### Storage:

Store in original sealed container and protect from extremes of temperature.

### Biodegradability:

All surfactants used in Evans Vanodine products comply with the current European Regulations concerning Biodegradability and protection of the environment.

### Quality Assurance

This product is manufactured in the U.K. by EVANS VANODINE INTERNATIONAL PLC whose Quality System is registered by THE BRITISH STANDARDS INSTITUTION Cert of Reg. No. FM 09535

### Revision Date: 0603



**EVANS VANODINE INTERNATIONAL PLC**

Brierley Road, Walton Summit, Preston, Lancashire, PR5 8AH, England

Telephone: +44 (0) 1772 322200 - Fax: +44 (0) 1772 626000

Web: [www.evansvanodine.co.uk](http://www.evansvanodine.co.uk) – Email: [sales@evansvanodine.co.uk](mailto:sales@evansvanodine.co.uk)

P. 1